

SHINDENGEN

Power Switching Regulators


MA2000 Series

MA2810

OUTLINE DIMENSIONS

Case : MA7

Unit : mm

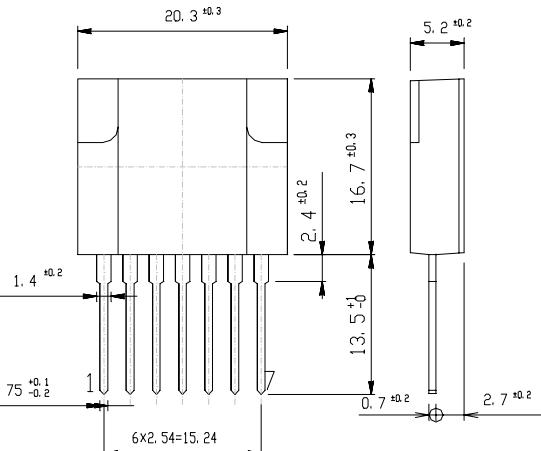

RATINGS

● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Storage Temperature	T _{stg}		-30~125	-30~125	°C
Operating Temperature	T _{op}	Case Temperature	-20~125	-20~125	°C
Junction Temperature	T _j		150	150	°C
Peak Input Voltage	V _{in}	(2)+, (4)-, Fig.1 is Measurement Circuit of Peak Input Voltage V _{in} and Collector Cutoff Current I _{CEX} .	850	850	V
Input Current	I _{in}	Pulse Pulse Width 150 μs MAX, Duty 1/2, Sawtooth Wave, Peak Value, (2)+, (4)-	4	4	A
Maximum Operating Frequency	f(max)		200	200	kH _Z
Maximum Power Dissipation	P _D	Ta=25°C	3	3	W
	P _D	Heatsink Tc=100°C	14	14	W
Dielectric Strength	V _{dis}	Terminals To Case AC 1 min	2	2	kV
Insulation Resistance		Terminals To Case 500VDC	100	100	MΩ
Fold Back Control Voltage	V _{CONT(max)}	Fold Control Resistance=0Ω Duty 1/2, (4),(7)	±8	±8	V
Fold Back Control Current	I _{CONT(max)}	(4)-(6)+	100	100	mA

● Electrical Characteristics (Tc=25°C)

Item	Symbol	Conditions	Ratings		Unit
			P Class	N Class	
Q1	Collector Cutoff Current	I _{CEX}	V _{CE} =850V, Fig.1 is Measurement Circuit of Peak Input Voltage V _{in} and Collector Cutoff Current I _{CEX} , (2)+, (4)-	MAX 0.1	MAX 0.1 mA
	DC Current Gain	h _{FE}	V _{CE} = 5V, I _C = 1.0A, (2)+, (4)-, (5)I _B	13~26	8~16
	Collector to Emitter Saturation Voltage	V _{CE(sat)}	I _C =1.0A, I _B =0.2A, (2)+, (4)-, (5)I _B	MAX 1.0	MAX 1.0 V
	Thermal Resistance	θ _{jc}	Junction to Case	MAX 3.57	MAX 3.57 °C/W
D1	Reverse Current	I _R	V _R =800V, (1)+, (2)-	MAX 10	MAX 10 μA
	Forward Voltage	V _F	I _F =0.6A, (1)-, (2)+	MAX 1.7	MAX 1.7 V
Driving Saturation Voltage	V _{D(sat)}	I _C =1.0A, I _B =0.2A, (5) +, (4) -	MIN 1.7	MIN 1.7	V
			MAX 2.3	MAX 2.3	V

● Standard Operating Condition•Design Standard For Application Circuit

Item	Conditions	Ratings		Unit
		P Class	N Class	
Input Rated Voltage			AC90~274	V
Output Nominal Wattage		12	12	W
Output Nominal Voltage		12	12	V
Output Nominal Current		1	1	A

● Standard Operating Condition•Standard Operating Characteristics ($T_a=25^\circ C$)

Item	Conditions	Ratings		Unit
		P Class	N Class	
Minimum Input Full Load Output Voltage	$V_{in}=90V, I_O=1A$	12.0 ± 0.6	12.0 ± 0.6	V
Maximum Input Light Load Output Voltage	$V_{in}=274V, I_O=0.65A$	12.0 ± 0.6	12.0 ± 0.6	V
AC Input Voltage	$I_O=1A$	MAX 85	MAX 85	V
Over Current Protection	Foldback Current	$V_{in}=274V, V_O=10V$	MAX 1.75	MAX 1.75
	Short Circuit	$V_{in}=274V, R_O=0.5 \Omega$	No damage To Any Device, Automatic Recovery.	
Output Ripple Noise	$V_{in}=90 \sim 274V, I_O=0.1 \sim 1A$	MAX 150	MAX 150	mV P-P

Figure in ○=Terminal Sign

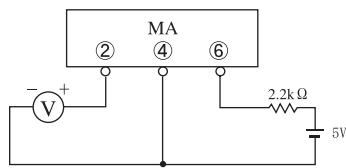


Fig1. Measurement Circuit


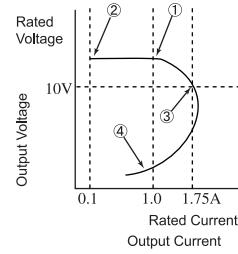



Fig2. Output Voltage/Current


MA2810 Transient Thermal Impedance

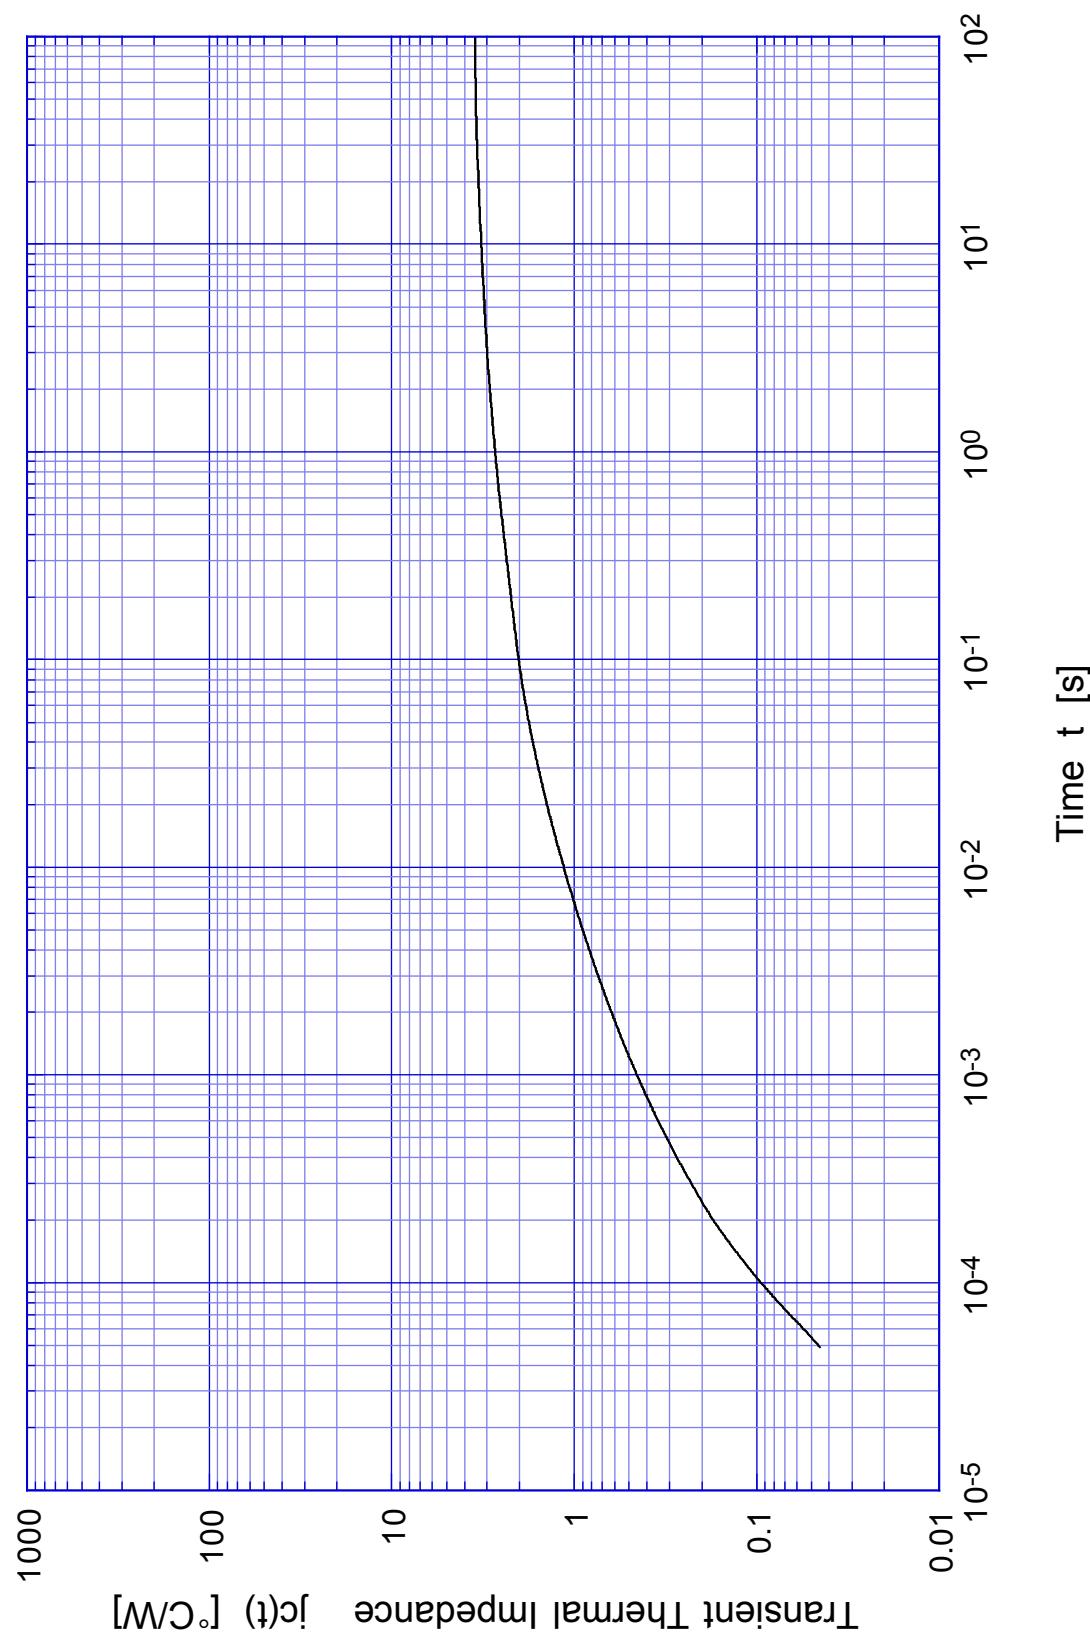

MA2810

Forward Bias SOA

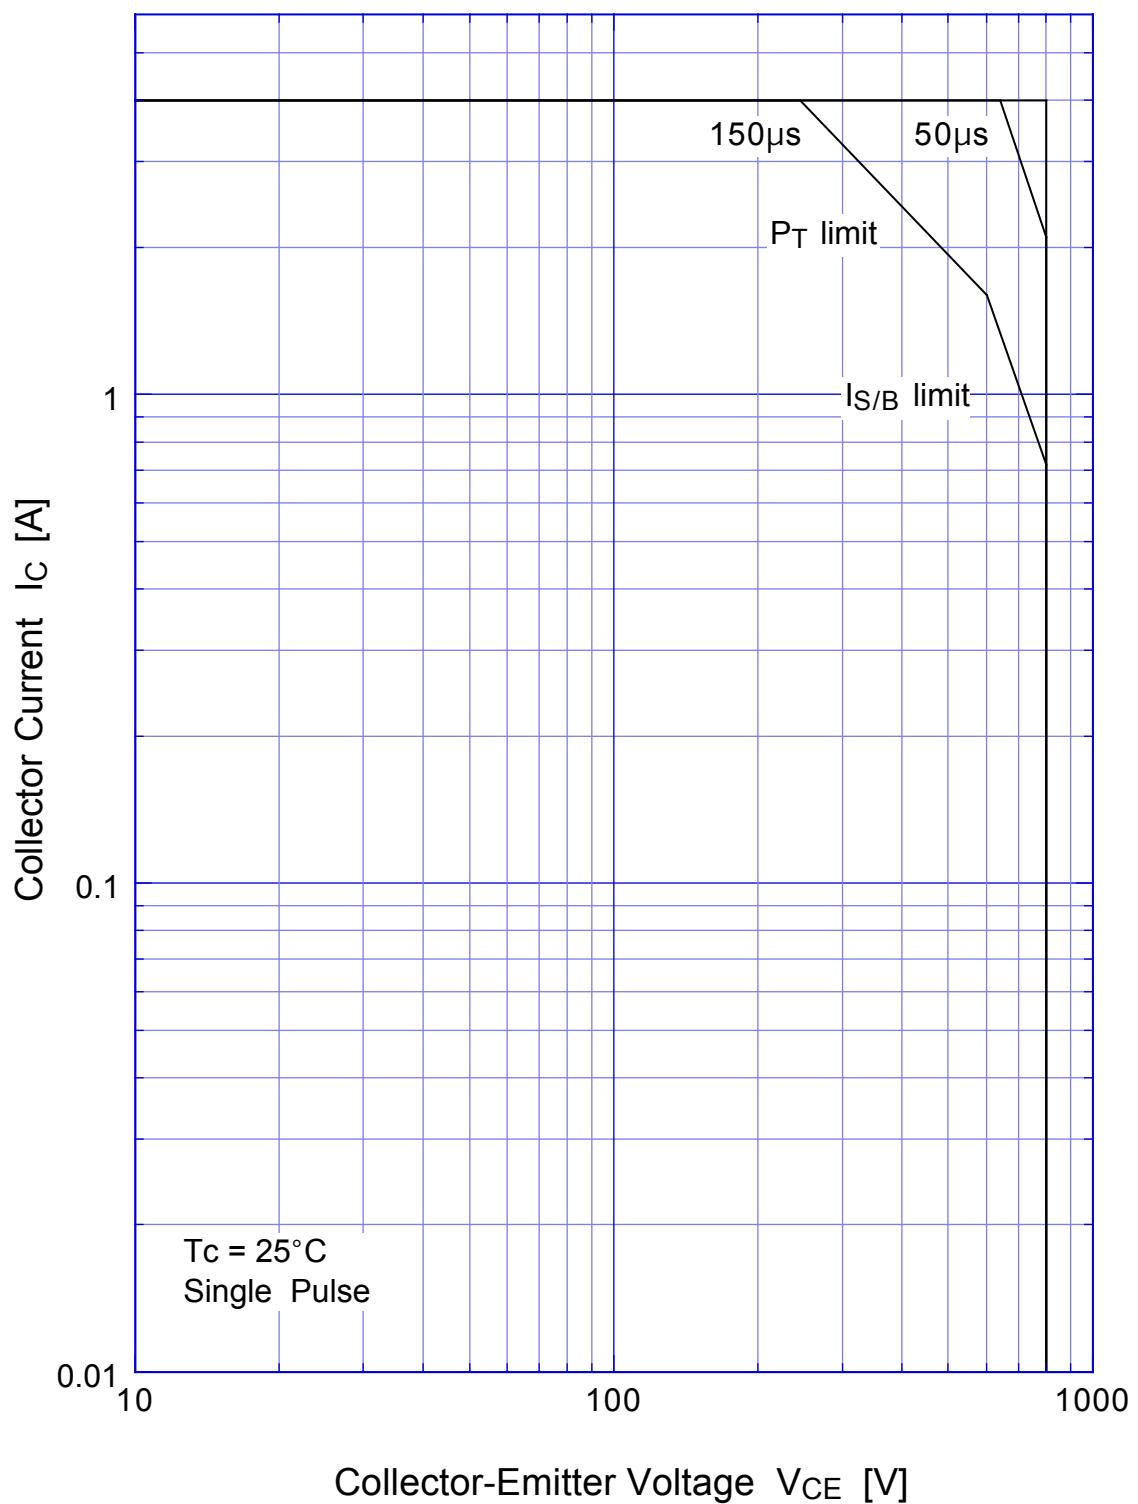

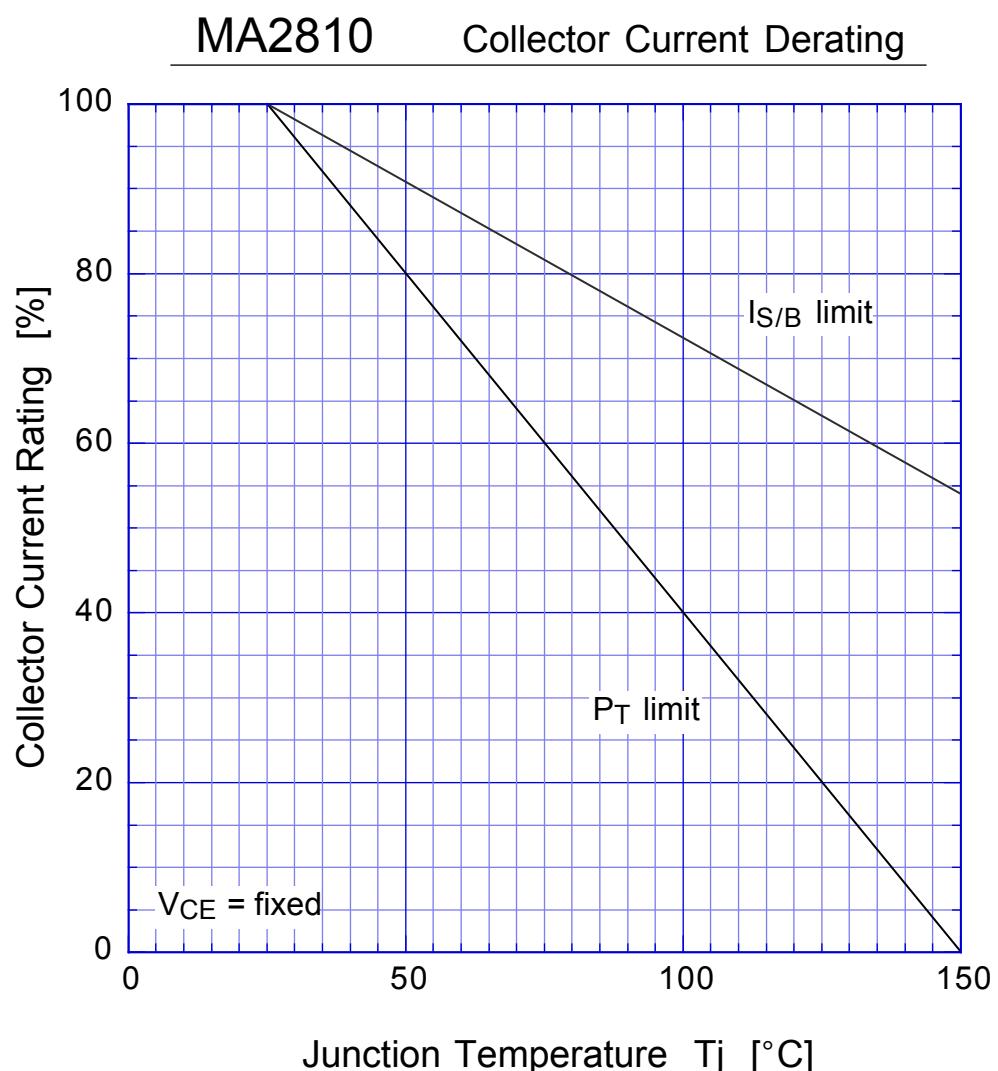

MA2810

Reverse Bias SOA

